



What is included?

On the official RE_Tractable Waist Belt and Calf Cuff, use the designated double holes to mount the leash body. Use the supplied 22 mm bolts and washers, tighten to a firm hand tight torque to ensure a secure and reliable connection.



RE_Tractable
Leash Base



4pcs
T10 21mm



2pcs
T10 24mm



2pcs
T10 27mm



2pcs
T10 30mm




Mounting
Webbing Loop



Board Leash
Plug String



4pcs
Washers

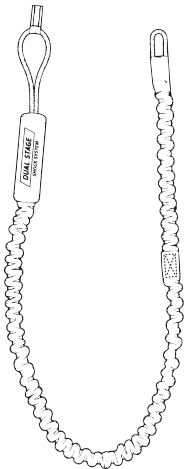

Dual Stage
Shock Cord



Assembling the RE_Tractable Reel Leash

To safely use the RE_Tractable Reel Leash, always pair it with a Ride Engine Dual Stage Shock Cord.

Use the 800 mm Shock Cord, supplied with the RE_Tractable Base Model, when the leash is mounted at the waist or higher on a belt or harness.

Use the 500 mm Shock Cord, supplied with the Calf Leash Wrap, only with the Calf Wrap.
Connect the shock cord to the retractable webbing using a loop to loop connection, making sure the shorter loop on the shock cord attaches to the webbing.

Attach the longer loop, with the integrated swivel, to your foilboard leash plug string using a lark's head knot.

